Abbreviations

acoustical	ACOUS.
air condenser	AC
adjustable	ADJ.
alternate	ALT.
aluminum	ALUM.
anchor bolt	AB.
appliance	APLN.
approximate	APPROX
area drain	AD.
basement	BSMT.
beam	BM
between	BET.
blocking	BLK.
bottom	BOT
bottom of wall	B.O.W.
building	BLDG.
cabinet	CAB.
cement	CEM.
center line	C/L
center to center	C/C
ceiling	CLG.
ceramic	CER.
clear	CLR.
closet	CLOS.
column	COL.
conc. masonry unit	C.M.U.
concrete	CONC.
construction	CONST.
continuous	CONTU.
counter	CTR.
cubic ft. per minute	CFM.
degree	°
department	DEPT.
detail	DET.
diameter	DIA.
digital subscriber line	DSL.
dimension	DIM.
dishwasher	DW.
disposal	DISP
door	DR.
double	DBL.
down	DN.
down spout	DS.
drawer	DWR.
drawing	DWG.
each	EA.
each way	EA.WAY.
edge nail	E.N.
electrical	ELEC.
elevation	ELEV.
elevator	ELE.
enclosure	ENCL.
equal	EQ
equipment	EQUIP.
existing	EXIST./ E
existing grade	E.G.
exterior	EXT.
finish floor	F.F.
finish grade	F.G.
finish	FIN.
flashing	FLASH
floor	FLR.
floor drain	FD.
fluorescent	FLUOR.
forced air unit	F.A.U.
foot	FT
footing	FTG.
foundation	FDN.
galvanized	GALV.
galv. sheet metal	GSM.
gauge	GA.
glass, glazing	GL
glue lam beam	GLB.
garbage disposal	GD
grade	GRD.
ground	GND.
ground fault interrupter	GFI.
gypsum board	GYP. BD.
hardware	HDWE
hard wood	HDWD.
header	HDR.
height	HT
hold down	HD
hollow core	HC
hose bib	HB
horizontal	HORZ
inch	IN.
including	INCL
information	INFO
installation	INSTAL
insulation	INSUL.
kitchen	KIT.
line	LN.
laminate	LAM.
lavatory	LAV.
landing	LDG.
manufacturer	MFR.
material	MATL.
maximum	MAX.
mechanical	MECH.
medicine cabinet	MC
metal	MTL.
microwave oven	MIRCO
minimum	MIN.
mirror	MIR
new	NEW / N.
not in contract	N.I.C.
not to scale	N.T.S.
obscure	OBS.
on center	O.C.
opening	OPG.
oriented strand board	OBS.
outside diameter	O.D.
over	O/
pair	PR.
perforated	PERF
perforated drain line	PDL.
perpendicular	PERPEN.
plastic laminate	PLAM.
property line	PL.
plywood	PLYWD
pressure treated	PT.
quality	QUAL
quantity	QUAN.
radius	RD.
redwood	RWD
reference	REF
refrigerator	REFRIG
required	REQ.
return air register	RAR
rise & stair	R
room	RM
rough opening	RO
section	SEC.
sheathing	SHTG
sheeting	SHT.
shelf	SHL.
similar	SIM.
solid core	SC
specification	SPEC.
square	SQ.
square foot	SF
stainless steel	SS.
steel	STL.
structural	STRUCT
supply air register	SAR
system	SYS.
telephone	TEL
tempered	TEMP
thermostat	THMS
thick	THK
thickened	THKEND.
tight drain line	TDL
toilet paper holder	T.P.
tongue & groove	T&G
top of curb	T.O.C.
top of plate	T.O.P.
top of wall	T.O.W.
towel bar	TB
tread & stair	T
typical	TYP.
unless noted otherwise	U.N.O.
verify in field	VIF.
vertical	VERT.
water heater	WH
waterproof	WP
waterproof membrane	WPM
welded wire mesh	WWM
with	W/
without	W/O
wood	WD.

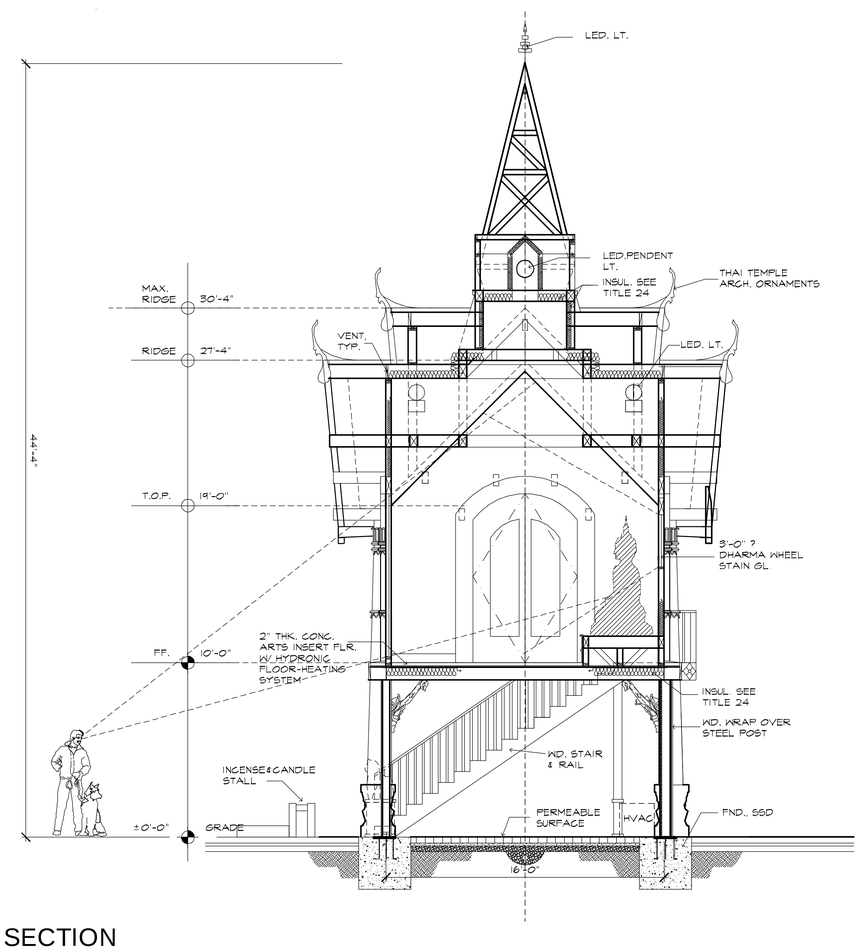

A SECTION

SCALE:1/4"=1'

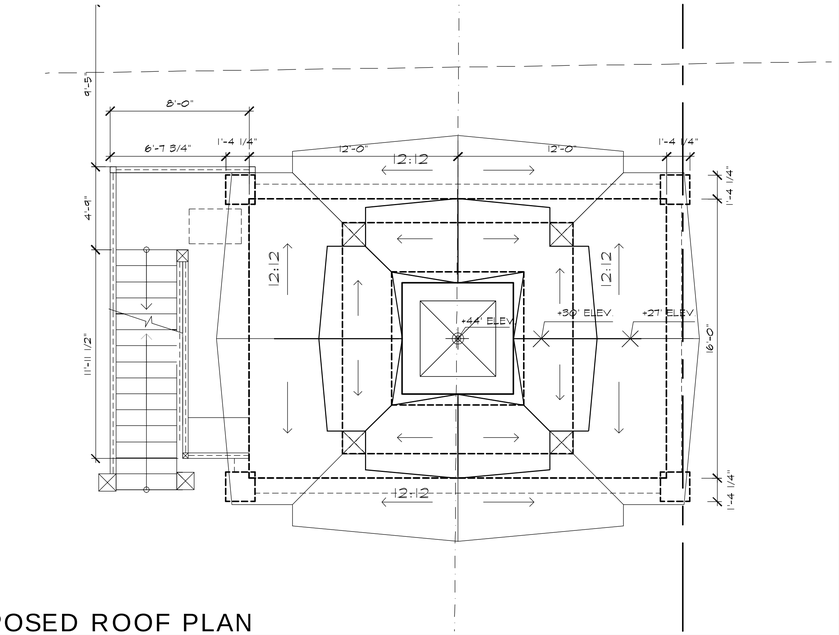

PROPOSED ROOF PLAN

SCALE:1/4"=1'

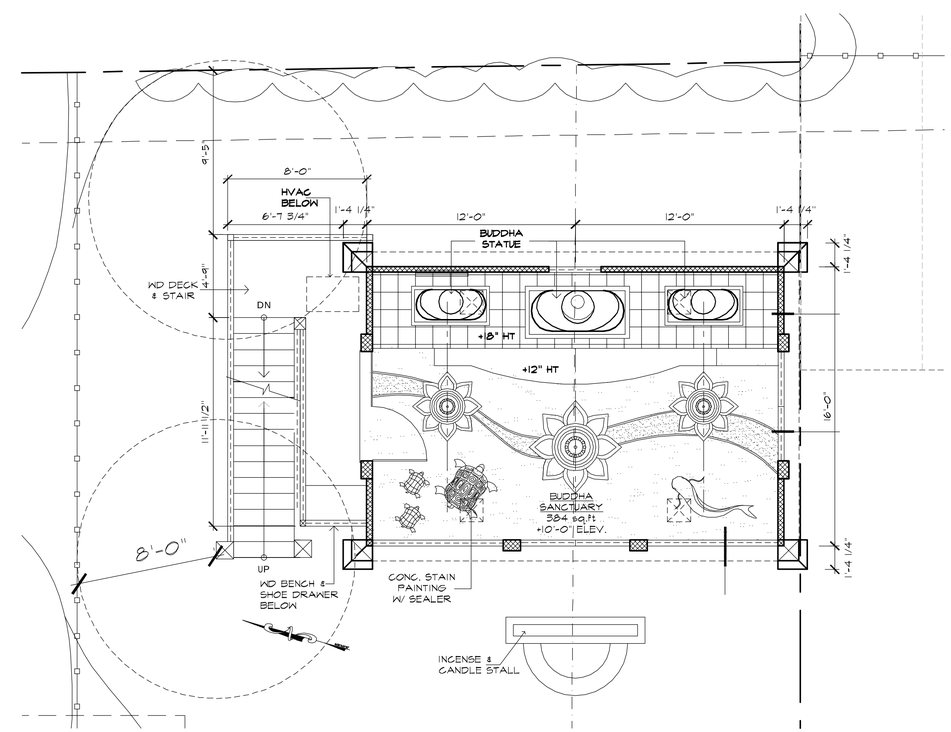

PROPOSED FLOOR PLAN

SCALE:1/4"=1'

0 1' 12'

1/4" = 1'-0"

NO.	REVISIONS

Guy Supawit
Designer
DESIGN &CONSTRUCTION DEPARTMENT
WAT MONGKOLRATANARAM
Ph. 510.849.3419
email: guy@artandidea.com

BUDDHA SANCTUARY BUILDING FOR

WAT MONGKOLRATANARAM

1911 Russell St. Berkeley, CA 94703

Ph.: 510.849.3419

PROPOSED FLOOR PLAN

DRAWN	GS
CHECKED	GS
DATE	01/05/09
SCALE	AS NOTED
JOB NO.	0501
SHEET	

A-2

OF SHEETS